

TRANSPORT DIMENSIONS

Width - 8 ft.

Operating Weight - 36,000 lbs.

Height - 11 ft.

Length - 24 ft.



OPERATING DIMENSIONS

Max Placing - 60' Boom Rotation - 90°
Max Pitch - 45° Machine Rotation - 360°
Down Angle Pitch - 10°

UNDERCARRIAGE

- Rubber Pro Tracks
- 8' Track Width
- Travel Speed - 3.5 Mph



Visit us online —
stoutconveyors.com

Instagram - @stoutconveyors
Facebook - @stoutconveyors
YouTube - @stoutconveyors5929

Nick Bardall, Sales
nick@stoutconveyors.com
216-570-1544

PRIMARY CONVEYOR

- Tungsten Carbide belt scraper system for dependable belt cleaning
- 50'+ horizontal telescoping reach 14" conveyor belt with vulcanized splice
- Operating height of 10'
- Belt rides on a troughing frame design with UHMW rails for reduced idler roller maintenance
- Maximum observed performance-
 - 2.5 Cu.Yd./Min
- Variable belt speed 0-100%
- Slinging distance- 80'

FEED HOPPER


- 5cy Standard - 7cy with wings. Hydraulic Folding Wings
- Chain Driven 24" Feed Belt

POWER

- 172 HP Cat Engine
- Hydraulic Closed Loop Drive
- Circuit & Open Loop Function Circuit

SYSTEM CONTROLS

- R/C unit with proportional functions allowing for fine control. Redundant manual controls available at operators station
- Independent variable speed control for feed and primary belts

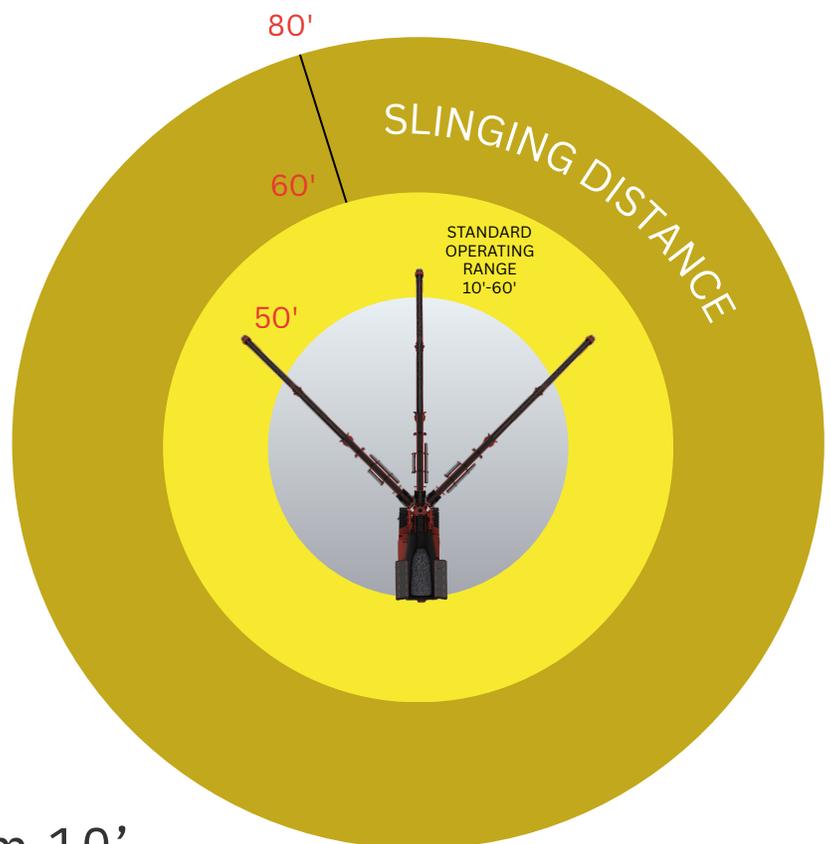

Operating distance from 10' to 60' (placing), 80' slinging distance. 172 horse CAT engine.